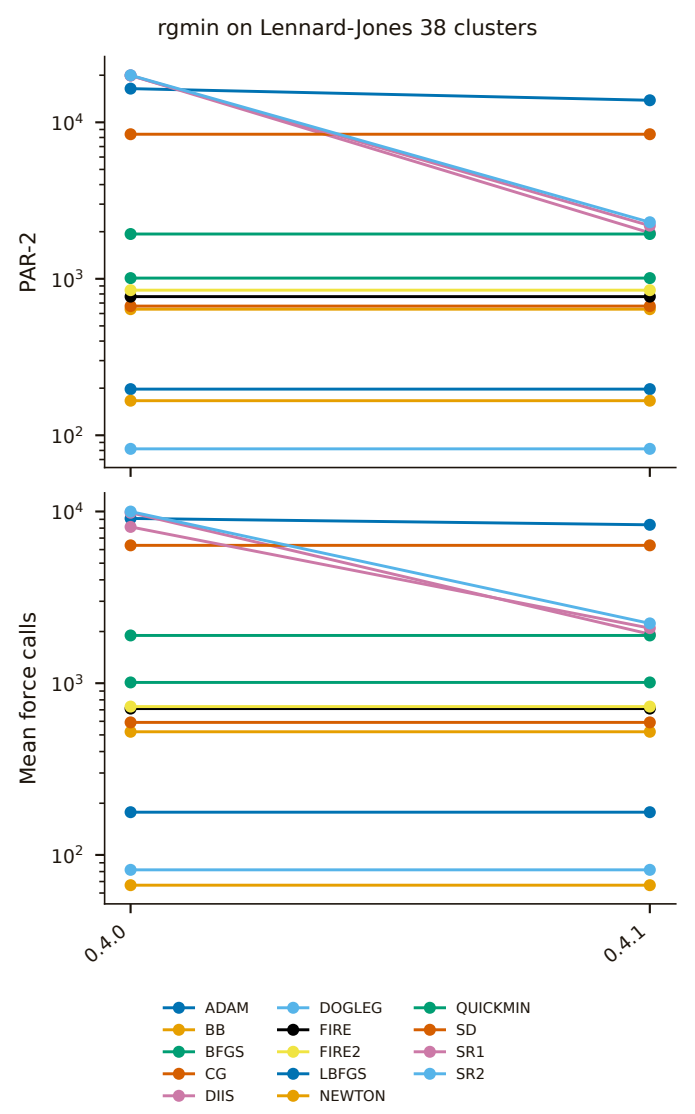


rgmin on Lennard-Jones 38 clusters. Each point is one recorded version of one method. Versions run left to right in numeric order. PAR-2 is omitted where that row has none. No line is drawn across a missing value.